


PERFORMANCE DATA			
Initial lumens at rated watts after 100 hours operation	90000	Lm	
Rated average life	24000	Н	
Warm up time (90% lumens)	7	Min	
Correlated color temperature	2000	к	
CIE chromaticity	0.52,0.42	x,y	
Color rendering index	20		
Operating Position	U		
PAR value (400-700nm)	1100	µmol/s	

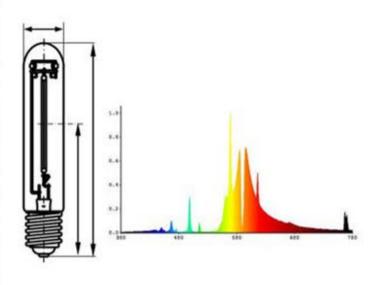

ELECTRICAL CHARACTERISTICS			
Nominal lamp wattage	600	W	
Nominal lamp voltage	188	V	
Nominal lamp current	3.6	Α	

		Typic	al lamp	mortal	ity	
g	100%					\neg
Ē	80%					
Lamps sun purning	60%	_	_	_		
2 20	40%	_	_	_	-	-
Ē	20%	-	-	-	-	-
ű	0%			1000	73270	
	0%	20% Pe	rcent o	f rated	80% life	100%

PHYSICAL DESCRIPTION			
Maximum overall length	290	mm	
Light center length	170	mm	
Max Bulb diameter	48	mm	
Base to bulb eccentricity (max)	3	degrees	
Maximum bulb temperature	400	°C	
Bulb designation	T46		
Bulb material	Borosilicate(Hard Glass)		
Arc tube material	PCA		
Bulb finish	Clear		
Base designation	E39		

